




### Secure Processing of One-Piece Mailers

The AutoSeal<sup>®</sup> FD 2096 uses patented pressure seal technology to efficiently process cut-sheet pressure seal forms in a mid-volume production environment, at speeds of up to 30,000 forms per hour. Its bottom-suction air-feed system provides accurate feeding and allows for continual loading of forms, dramatically reducing down time.

Set-up is quick and easy with rugged metal fold pates, clearly marked with both standard and metric markings, and fold rollers made of heavy-duty polyurethane foam, which eliminates the need for gap adjustments. The sealing unit utilizes an adjustable 17" ball transport deck for a smooth, reliable transition from the fold rollers into the sealer.

User-friendly features include sound-dampening fold plate covers for quieter operation, a 6-digit resettable LED counter, rugged locking casters, and a high-capacity 24" output conveyor which is collapsible for convenient storage when not in use.

Heavy duty construction combines with quick set-up and operation to make the FD 2096 a powerful solution for processing mid-volume pressure-seal mailings.

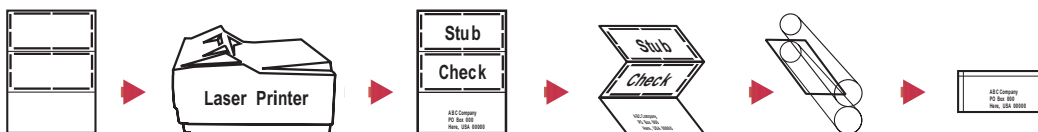

## Operating Features

**Variable Speed:** Large jobs are processed quickly at speeds of up to 30,000 forms per hour

**Top-Loading Bottom Air Feed:** The air feed deck accurately feeds forms, while allowing for continuous top feeding, with no need to stop and reload

**Resettable Counter:** 6-digit LED counter provides maximum audit control

**Noise Reduction:** Covers and fold plates are insulated to reduce operating noise

**Rugged Construction:** Designed for mid-volume production environments

**Casters for Easy Transport**

## Folding Features

**Heavy Duty Fold Rollers:** Polyurethane foam rollers eliminate the need for gap adjustments

**Rugged Fold Plates:** Metal fold plates feature metric and standard scales for easy fold setting

**Air-Feed Pump:** Fully enclosed

**Rotating Air Suction Drum:** Located on the feed table, separates sheets for accurate feeding

**User-Friendly Adjustments:** Fold plates feature a 7-point quick-release fold stop, skew adjustment and fine tuning knob

## Sealing Features

**Pressure Rollers:** Precision ground clutching four-roller system

**Ball Transport Deck:** Adjustable 17" ball-deck provides smooth, efficient transport from the folder into the sealer

**Fault Detection:** Infrared sensor located at the infeed of the sealer detects any faults and sends a signal to stop the folding unit

**Plexi-Cover:** Hinged with a handle to allow quick access to the sealing area. Includes safety interlock to stop the system when opened.

**Static Eliminator Brush:** Located on the exit of the sealer to reduce static electricity and assist in the neat, sequential stacking of forms onto the conveyor

## Conveyor Features

**24" Outfeed Conveyor:** Includes speed control and run-out switch for easy unloading of processed forms

**Adjustable Stacking Wheels:** Help to keep processed forms in a neat, sequential order

## Options

**402 Series Jogger:** Reduces static electricity and aligns forms for proper feeding

**V-Stack36 Stacker:** Vertically stacks up to 22" of folded documents, making them easier to unload

**Center Slitter:** For applications including 2-up postcards

## Specifications

Hopper Capacity:	Up to 350 sheets 24#
Variable Speed:	Up to 30,000 forms per hour
Usage:	Mid-Volume Production
Paper Size:	Up to 12" wide, up to 17" long
Dimensions (Conveyor Extended):	86" L x 28" W x 42" H
Dimensions (Conveyor Closed):	64" L x 28" W x 42" H
Weight:	450 lbs
Power:	120V 60Hz, 30Amp, single phase
Power Plug:	NEMA L5-30P



6-digit resettable LED counter



Rotating air-suction drum separates forms for accurate feeding



24" outfeed conveyor helps keep forms in a neat order after processing



FD 2096 Pressure Sealer, in-line with optional V-Stack36 Vertical Stacker and V-Stack36-10 Adjustable Stand

**ADVANTAGE**  
BUSINESS EQUIPMENT

WWW.ABE-Online.com  
TEL: 800-560-2242